

Océ VarioStream 7000 Single

System data




Power and economy in digital printing

Simplex printing system for flexible growth

You're looking for a printing system that grows with your business and responds flexibly to the challenges of new applications? You need no-holds-barred productivity? And advanced technology to future-proof your investment? The Océ VarioStream® 7000 Single delivers all this and more for your transactional applications.

Variability: configuration à la carte

The Océ VarioStream 7000 Single is engineered for best performance today. And for growth in the future. The key is an extensible design, with field-upgradeable speeds from 180 to 600 ppm A4 (2-up), variable print quality (economical standard 240/300 dpi to 600 dpi graphics quality) and optional Océ CustomTone® colour or MICR. You can choose either leading pinless technology or tractor paper transport. You can also add print engines for duplex or triplex printing.

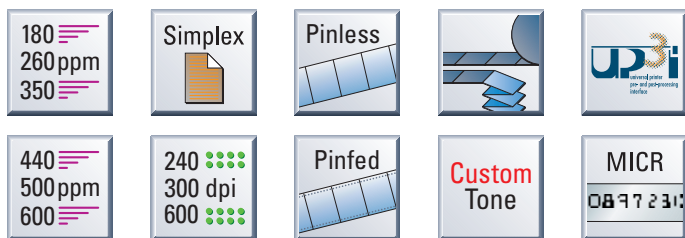

Total productivity: speed and process control

Designed to do far more than print, the Océ VarioStream 7000 Single integrates perfectly into workflow solutions using process control with UP³I, a multi-vendor, open standard for smart communication between the devices of the production line.

Future-proof investment

Featuring the latest SRA controller and hardware, the Océ VarioStream 7000 Single has built-in future security. Enhanced print quality option (EPQ) provides significant benefits for applications where superb digital quality is required. Better halftone reproduction is achieved through more precise dot placement and shape. You can handle more diverse applications—with the assurance of superb results every time, even on lightweight papers and heavy stock up to 160 g/m² with the modern pinless technology. The Océ VarioStream 7000 Single offers unprecedented flexibility, power and adaptability in digital production printing, now and in the future.



Océ VarioStream 7000 Single

Technology

Variants Océ VarioStream 7200, 7300, 7400, 7450, 7550, 7650

Print system Electrophotographic
LED technology with 600 dpi print field resolution

Fusing method Heat-pressure fusing

- Standard features**
- Intuitive operating with State-of-the-art Graphical User Interface
 - Single Point of Operation
 - Dual operating: touchscreen + mouse
 - Type I interface for Pre & Post
 - Installed Quick Change Developer Station (QCDS)
 - Speed switch to lower speeds for special applications and Pre & Post adaptations¹

Physical

Operating noise (Standby values in brackets)
max. 67 dB (A) (max. 61 dB (A))

Environmental	Rated range	Limit range
Temperature	15°C - 30°C	10°C - 32°C
Rel. humidity	40% - 60%	40% - 80%
Lower abs. humidity	2 g/m ²	1 g/m ²
Higher abs. humidity	22 g/m ²	25 g/m ²

Dimensions	Height	Width	Length
	1,549 mm	1,060 mm	2,316 mm

Weight Approx. 1,260 kg

Connectivity

Native printer codes IPDS, PCL5e, Enhanced mode (E/C mode)²
(free choice of 1st printer code)

Interfaces Gigabit Ethernet, SCSI, /370, ESCON
(free choice of 1st interface)

Options

- Expansion by up to two interfaces
- Second and third printer code (E/C mode², PCL5e, IPDS)
- Additional Quick Change Developer Station (QCDS)
- Océ CustomTone
- MICR (not on Océ VarioStream 7200 and 7300)
- Upgrade to Twin or Triplex system
- Power stacker (up to 16" paper length)
- UP³I support for improved productivity and process control
- Enhanced print quality for industry leading imaging quality and productivity

Production

Print qualities	Data Resolution	Consumables	Application Examples
Standard	240/300 dpi Manual switch	Standard	Bills, invoices, statements, personalisation
Production	240/300/600 dpi Auto detection and switch	Standard	Brochures, direct mail, text books, newspapers
Graphics ³	240/300/600 dpi Auto detection and switch	Premium	Books, manuals, direct mail (graphics)

Paper

	Pinless	Tractor ⁴
	Pinless paper transport for single-layer continuous forms with or without tractor feed margins, perforated, coloured or preprinted	Tractor paper transport for single-layer continuous forms with tractor feed margins, perforated, coloured or preprinted
Form width	165 - 482.6 mm (6.5 - 19 inches) fully variable	165 - 457.2 mm (6.5 - 18 inches) fully variable
Form length	76.2 - 711.2 mm (3 - 28 inches) in increments of 1/60"	in increments of 1/6"
Paper weight	50 - 160 g/m ² 36 - 49 g/m ² on Océ specified papers and configurations	70 - 160 g/m ²

Weights outside these limits are subject to satisfactory test results

Paper feed Roll, stack, jumbo stack

Connects to

Océ PRISMA[®]production[®] AFP/IPDS, TIFF, PDF, PostScript, PCL, LCDS (Metacode), OLDS, PPML

Others z/OS, InfoPrint Manager, BS2000, PReS, GMC, HP3000/9000

¹ Please contact your local salesrep. for details

² Field upgradeable; max. 350 ppm (A4, 2-up)

³ Not available on Océ VarioStream 7650; enhanced print quality (EPQ) recommended for all speeds; Océ VarioStream 7450 + 7550 in combination with EPQ only

⁴ Tractor paper transport only available for Océ VarioStream 7200, 7300, 7400 and 7450

⁵ The equipment complies with EN 61000-3-11 (2000)/IEC 61000-3-11 (2000)

Electrical values	Unit	VarioStream 7200	VarioStream 7300	VarioStream 7400	VarioStream 7450	VarioStream 7550	VarioStream 7650
Rated voltage	V	400/230 ± 10%	400/230 ± 10%	400/230 ± 10%	400/230 ± 10%	400/230 ± 10%	400/230 ± 10%
Mains frequency	Hz	50 ± 1	50 ± 1	50 ± 1	50 ± 1	50 ± 1	50 ± 1
Safety fuses ⁵	A	4 x 50	4 x 50	4 x 50	4 x 50	4 x 50	4 x 50

Power consumption (Standby values in brackets)

Real P _W	kW	7.3 (1.9)	8.4 (1.9)	10 (2.0)	11.4 (2.0)	12.5 (2.1)	14.1 (2.1)
Apparent P _S	kVA	8.8 (2.6)	9.7 (2.6)	11.1 (2.6)	12.5 (2.6)	13.9 (2.9)	15.6 (2.9)
Heat output Q	kJ/h	26,280 (6,840)	30,240 (6,840)	36,000 (7,200)	41,040 (7,200)	45,000 (7,560)	50,760 (7,560)

Maximum printing speeds (pages per minute, 1/0 printing)

DIN A4 portrait (2-up) 2 x 11 ² / ₃ x 8 ¹ / ₂ "	180	260	350	440	500	600
Letter portrait (2-up) 2 x 11 x 8 ¹ / ₂ "	190	275	371	467	530	636
m/min	26.67	38.54	51.86	65.26	74.13	88.97
Ft/min	87.5	126.4	170.1	214.2	243.2	291.9



For information and services, visit us at www.oce.com

Printing for
Professionals

© 2005 Océ. Illustrations and specifications do not necessarily apply to products and services offered in each local market.

Technical specifications are subject to change without prior notice. All other trademarks are the property of their respective owners.