

Productive,  
efficient and  
dependable

imageRUNNER ADVANCE  
6255i, 6265i, 6275i

you can

Offering fast and efficient mono output for demanding office environments, these smart multifunctionals will enhance your document workflows, protect confidential information and reduce environmental impact.

55-75 PPM MONO

21.3 CM TOUCH SCREEN UI

1200 DPI PRINTING

UP TO 7,700 SHEET CAPACITY

ADVANCED FINISHING

MODULAR DESIGN



### Productivity

- Unrivalled user experience through a large 21.3 cm colour touch screen and intuitive menus
- Personalisation through user-defined one-touch buttons to simplify and automate common tasks
- 300-sheet one-pass duplex scanner captures paper documents at speeds of up to 200 ipm
- Standard support for scan file formats such as Searchable PDF and Open XML (PowerPoint) enables search and re-use of digital content
- Robust design and up to 7,700 sheet paper capacity
- Optional Fiery-based imagePASS-U2 controller enhances processing, job management and workflow automation
- Flexible media handling plus advanced finishing options such as automatic stapling, document insertion, hole-punching, booklet printing, as well as C/Z folding for versatile document creation in-house
- Support for mobile working.

### Cost Control

- Functionality of multiple devices in one efficient and configurable MFP
- Usage tracking provides visibility of print behaviour
- Apply policies and restrict usage at function level by user
- Device management tools offer status monitoring, configuration, reporting and diagnostics for efficient maintenance and maximum uptime
- uniFLOW cost-centre selection and job redirection offers cost optimisation.

 **imageRUNNER**  
ADVANCE

**Canon**

## Device and information security

- Smart user authentication enables controlled device access without impacting convenience
- Disable functions by user to prevent unauthorised use
- Secure print, mailbox and secure erase of jobs enhance document confidentiality
- A variety of advanced standard features protect the device, network communication and documents
- An extensive range security options offer compliance to the highest levels covering all aspects of information security
- Industry-first Data Loss Prevention and auditing of prints, copies, scans and faxes through uniFLOW.

## Integration

- Support for industry and network standards i.e. Genuine Adobe PostScript and PCL ensures hassle-free integration
- Seamless integration with ERP, CRM and other business information systems
- Canon's powerful MEAP platform provides a strong link to a range of document, capture and output management solutions for process optimisation
- Easily configure, manage and upgrade your device, whether individually, or as part of a larger fleet using Canon's device management tools.


## Sustainability

- Class-leading Typical Electricity Consumption (TEC)\* ratings
- Consumes as little as 0.9 W in sleep mode
- Incorporates recycled materials and Bio-plastics
- ENERGY STAR® qualified.

# Specifications: imageRUNNER ADVANCE 6200 series

Machine type	Monochrome Laser Multifunctional (Reader/Printer separated)
Available Core functions	Print, Copy*, Scan*, Send* and Optional Fax * Requires DUPLEX COLOUR IMAGE READER UNIT-G1. Printer only version requires PRINTER COVER-B1.
<b>PRINTER SPECIFICATIONS</b>	
Print speed	IR-ADV 6255i: 55 ppm (A4), 32 ppm (A3), 40 ppm (A4R), 35 ppm (ASR) IR-ADV 6265i: 65 ppm (A4), 32 ppm (A3), 47 ppm (A4R), 35 ppm (ASR) IR-ADV 6275i: 75 ppm (A4), 37 ppm (A3), 54 ppm (A4R), 35 ppm (ASR)
Printing method	Monochrome laser beam printing
Print resolution	1200 dpi x 1200 dpi, 600 dpi x 600 dpi
Double sided printing	Automatic (Standard)
Printing from memory media	Directly from USB memory key, Memory cards (SD, Compact Flash and Memory Stick via optional MULTIMEDIA READER/WRIITER-A2), Remote UI, Advanced Space and Web Access Supported file types: JPEG, TIFF, PDF*, XPS*. * Requires P5 PRINTER KIT-AV1 for PDF or DIRECT PRINT KIT (for PDF/XPS)-H1 for PDF/XPS. XPS direct print from removable media is not available.
Printing from mobiles or internet-connected devices and cloud-based services	A range of software and MEAP-based solutions is available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Paper input (Standard)	2 x 1500-sheet cassettes + 2 x 550-sheet cassettes (80 gsm) 100-sheet multi-purpose tray
Paper input (Option)	1 x 3500-sheet side paper deck (A4, 80 gsm) (PAPER DECK UNIT-A1 for A4) 1 x 3500-sheet side paper deck (A4, 80 gsm) (PAPER DECK UNIT-D1 for A3) 7700 sheets (80 gsm)
Maximum paper input capacity	
Paper output capacity	With Copy Tray : 250-sheets (A4, 80 gsm). With Shift Tray : 500-sheets (A4, 80 gsm). With External Finishers: Max. 4000-sheets (A4, 80 gsm).
Finishing capabilities	With finishing units: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Insertion, C & Z folding
Supported media types	Upper Left/Right Cassettes (1/2): Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper Lower Cassettes (3/4): Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper, Tab paper*. *Tab paper can be fed from cassette 3 & 4 when the optional TAB FEEDING ATTACHMENT KIT-B1 is installed. Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Bond, Transparency, Label, Letterhead, Bond paper, Envelope PAPER DECK UNIT-A1: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper PAPER DECK UNIT-D1: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper
Supported media sizes	Upper Left/Right Cassettes (1/2): Standard size: A4, B5 Lower Cassettes (3/4): Standard size: A4, A4R, A3, A5R, B5, B5R Free size: 139.7 mm x 182 mm to 297 mm x 487.7 mm Multi-purpose tray: Standard size: A4, A4R, A3, A5R, B5, B5R, Envelopes (No. 10 (COM 10), ISO-B5, Monarch, ISO-C5, DL) Free size: 100 mm x 148 mm to 297 mm x 487.7 mm PAPER DECK UNIT-A1: A4 PAPER DECK UNIT-D1: A4, A3
Supported media weights	Cassettes: 52 to 220 gsm Multi-purpose tray: 52 to 256 gsm Duplex: 52 to 220 gsm
Page Description Language(s)	UFRII / PCL 5e/6 (Standard) Genuine Adobe PostScript Level 3 (option)
Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andal Mono WT /K/S/T* (Japanese, Korean, Simplified and Traditional Chinese)* Requires optional PCL INTERNATIONAL FONT SET-A1. PS fonts: 136 Roman
Operating System compatibility	UFRII: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8, MAC OS X (10.4.9 or later) PCL: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8 PS: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8, MAC OS X (10.4.9 or later) PPD: MAC OS 9.1 or later; MAC OS X (10.2.8 or later), Windows Server 2003/Server 2008/XP/Vista/Windows 7/Windows 8 Please refer to <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a> for availability of print solutions for other operating systems and environments including A5/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place.
<b>COPY SPECIFICATIONS</b>	
Copy speed	IR-ADV 6255i: 55 ppm (A4), 32 ppm (A3), 40 ppm (A4R), 35 ppm (ASR) IR-ADV 6265i: 65 ppm (A4), 32 ppm (A3), 47 ppm (A4R), 35 ppm (ASR) IR-ADV 6275i: 75 ppm (A4), 37 ppm (A3), 54 ppm (A4R), 35 ppm (ASR)
First Copy Output Time (FCOT)	IR-ADV 6255i: Approx. 3.3 seconds or less IR-ADV 6265i: Approx. 3.3 seconds or less IR-ADV 6275i: Approx. 3.1 seconds or less
Copy resolution	Reading: 600 dpi x 600 dpi Printing: 1200 dpi x 1200 dpi Up to 999 copies
Multiple copy	
Reduction/Enlargement	Zoom: 25-400% in 1% increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%
<b>FIERY PRINT CONTROLLER SPECIFICATIONS</b>	
Optional/Standard	Optional on all models
Name	imagePASS-U2 (External)
Page Description Language(s)	PCL and Adobe PostScript 3
Memory	2 GB
Hard Disk Drive	250 GB
Processor Speed	Intel Pentium Dualcore E5300 2.6GHz
Fonts	PS: 136 Adobe PS Fonts PCL: 113 PCL Fonts
Supported Operating Systems	Windows XP(SP3)/Server 2003 (SP2)/ Server 2008 (SP2)/ Vista (SP2)/ Vista SP1/ Windows 7, MAC OS (10.5 or later)
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB x 5 (Front x 1, Rear x 4)
Network protocols	TCP/IP (LPD/ Port 9100/ IPP/ SMB/ FTP), ATIP/ DDP (AppleTalk)
Other	SEQUENCE COMPOSE, SEQUENCE IMPOSE, SEQUENCE SUITE
<b>SCAN SPECIFICATIONS</b>	
Optional/Standard	DUPLEX COLOUR IMAGE READER UNIT-G1 provides: Colour flatbed scan unit and 300-sheet duplex automatic document feeder (1-Pass duplex colour scan).
Type	Colour flatbed plus Single-pass duplex automatic document feeder (1-Pass Duplex Scan)
Supported media size/s	A3, A4, A4R, A5, ASR, Free sizes (W x L): Min. 139.7 mm x 128 mm, Max. 432 mm x 304.8 mm
Supported media weight/s	Single-sided scanning: 38 to 220 gsm/64 to 220 gsm (BW/CL); Double-sided scanning: 50 to 220 gsm/64 to 220 gsm (BW/CL)
Scan resolution	100 dpi, 150 dpi, 200 x 100 dpi, 200 dpi, 300 dpi, 200 x 400 dpi*, 400 dpi*, 600 dpi* * Requires optional 512MB memory
Double sided scanning	2-sided to 2-sided (Automatic)
Scan speed	Single-sided (A4, 300 dpi): 120/85 ipm (BW/CL); Double-sided (A4, 300 dpi): 200/100 ipm (BW/CL)
Scan methods	Send functionality available on all models Scan to USB Memory Key: Available on all models Scan to Mobiles or internet-connected devices: A range of solutions is available to provide scanning to mobile devices or internet-connected devices depending on your requirements. Please contact your sales representative for further information. Scan to cloud-based services: A range of solutions is available to provide scanning to cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Full scanning available on all models
Pull scan specifications	TWAIN via Network TWAIN Driver (Colour Network ScanGear) Supported OS: Windows 2000/Windows XP/Windows Server 2003/Windows Vista/Windows Server 2008/Windows 7/Windows 8 (32 bit, 64 bit in compatibility mode) WIA via Network WIA Driver Supported OS: Windows Vista/Windows Server 2008/Windows 7/Windows 8 (32 bit, 64 bit)
<b>SEND SPECIFICATIONS</b>	
Optional/Standard	Standard on all models (Requires DUPLEX COLOUR IMAGE READER UNIT-G1)
Send resolution	100 dpi, 150 dpi, 200 x 100 dpi, 200 dpi, 300 dpi, 200 x 400 dpi*, 400 dpi*, 600 dpi* * Requires optional 512MB memory
Destinations	E-Mail/Internet FAX (SMTP), PC (SMB, FTP), WebDAV
Address Book/Speed dials	LDAP (1000)/Local (Max. 500)
File formats	TIFF, JPEG, PDF, XPS, High compression PDF/XPS, Searchable PDF/XPS, PDF/A-1b, Office Open XML (PowerPoint)
Optional Universal Send Feature Sets	UNIVERSAL SEND ADVANCED FEATURE SET-E1 (option): Create outline PDF (Trace and Smooth) and Adobe Reader Extensions PDF UNIVERSAL SEND SECURITY FEATURE SET-D1 (option): Send encrypted PDF, and add digital device signature to PDF/XPS files UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1 (option): Add digital user signature to PDF/XPS files
<b>FAX SPECIFICATIONS</b>	
Optional/Standard	Optional on all models
Modem speed	Super G3 33.6kbps (Up to 3 seconds/page)(See footnote 1)
Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
FAX memory	Up to 8000 pages (see footnote 1)
Speed dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses from the address book plus new 256 destinations
Memory backup	3 hours
Other features	Fax Forwarding, Dual Access, PC Fax (TX only)
<b>GENERAL SPECIFICATIONS</b>	
Warm-up Time	Approx. 30 seconds from Power ON (normal mode), 7 seconds from Power ON (quick start mode), 30 seconds from sleep mode
Interface type	USB 2.0 Hi-Speed Ethernet 1000Base-T/100Base-TX/10Base-T 2 x USB Host (2.0)
Network protocols	TCP/IP* (LPD/Port 9100/WSD/IPP/PPS/SMB/FTP), IPX/SPX (NDS, Bindery), AppleTalk *IPv4/IPv6 support
Processor Speed	1.8 Ghz
Memory	2GB (Optional 512MB memory for colour scan and send above 300 dpi)
Hard Disk Drive	Standard 160 GB Hard Disk Drive (usable space 160 GB)/Optional 1 TB Hard Disk Drive (usable space 1 TB)
Control panel	21.3 cm (8.4 inch) TFT LCD SVGA Colour Touchscreen, Optional 26.4 (10.4 inch) TFT SVGA tiltable Colour Touchscreen display
Dimensions (W x D x H)	645 mm x 770 mm x 1220 mm (with DUPLEX COLOUR IMAGE READER UNIT-G1)
Installation space (W x D)	1362 mm x 1289 mm (Basic: Only Multi-purpose tray + Cassette drawers open + Copy Tray) 2381 mm x 1353 mm (Fully configured: Includes Booklet finisher + A3 Paper Deck + Insertion and folding unit + Puncher unit + Cassette drawers open)
Weight	Approx. 234 kg (with DUPLEX COLOUR IMAGE READER UNIT-G1)
Operating environment	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (no condensation)
Power Source	220-240 V (±10%), 50/60 Hz (±2 Hz), 10 Amp
Power Consumption	Maximum: Approx. 2.4 kW Standby: Approx. 246 W Energy Saver Mode: Approx. 223 W Sleep mode: Approx. 0.9 W or less (See footnote 2) Typical Electricity Consumption (TEC) rating (See footnote 3): 5.3 kWh (IR-ADV 6255i) 5.8 kWh (IR-ADV 6265i) 6.7 kWh (IR-ADV 6275i)
Noise Levels	Sound Pressure (See footnote 4) Active: 56 dB (IR-ADV 6255i), 57 dB (IR-ADV 6265i), 57 dB (IR-ADV 6275i) Standby: 36 dB
Software and printer management	<b>IR Management Console:</b> Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) <b>eMaintenance:</b> Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) <b>Content Delivery System:</b> Allows the Remote distribution of firmware, IR options and MEAP applications) <b>Remote User Interface (RUI):</b> Web-based interface to each device that helps to provide remote device management and control <b>Network ScanGear:</b> TWAIN-compliant scanner driver that enables computers on a network to use the full scan functionality of the device <b>Canon Driver Configuration Tool:</b> A utility for changing the factory default settings of Canon print drivers (Available via service only) <b>NetSpot Device Installer:</b> Simple utility software that allows you to make network protocol settings for Canon devices connected to your network <b>MEAP (Multifunctional Embedded Application Platform):</b> A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device <b>MEAP Web:</b> Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services
Security Features	Standard: IP/Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Trusted Platform Module (TPM), Secure Print, Hard Disk Password Lock, Hard Disk Drive Erase, Universal Login Manager, Department ID, SSO-H, Mailbox, Access Management System. Optional: Encrypted Secure Print, Encrypted PDF, Hard Disk Drive Mirroring and Encryption, User and Device signatures, Secure Watermarks, Document Scan Locking, Hard Disk Drive removal The following items require uniFLOW: My Print Anywhere secure print, Data Loss Prevention.
<b>CONSUMABLES</b>	
Toner Cartridge/s	C-EXV 36 TONER BK (Yield 56000 pages See footnote 5)

## Main configuration options

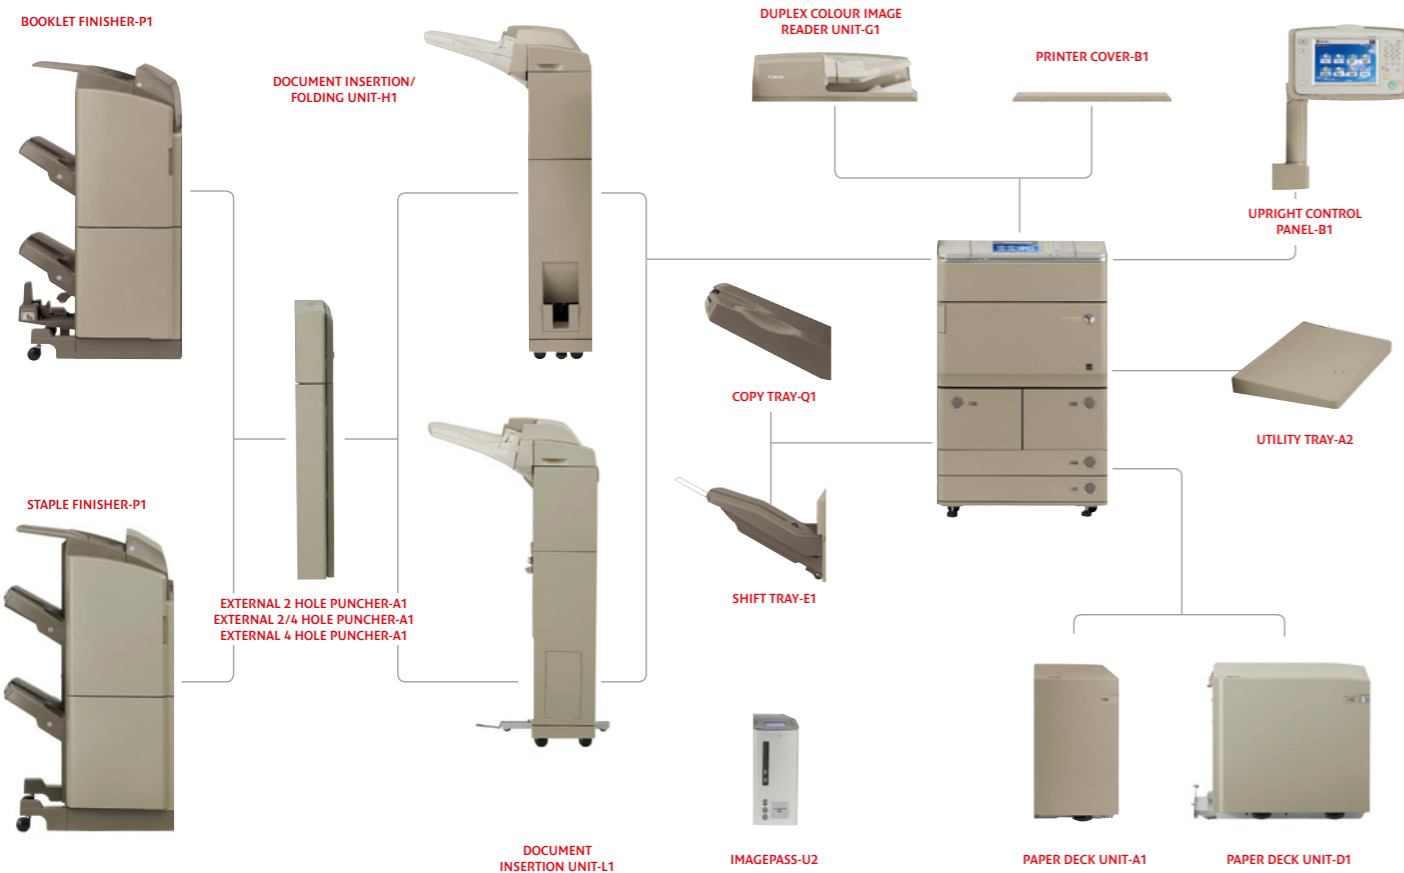

For full details of all options, please refer to the product specifications.

**Canon**

\*Defined by ENERGY STAR (<http://www.eu-energystar.org>)

# Specifications: imageRUNNER ADVANCE 6200 series

Staple Finisher	Name: STAPLE FINISHER-P1 (External) Number of Trays: 3 Tray A (Upper) Capacity: A4 1300 sheets, A3/A4R/A5 650 sheets Tray B (Middle) Capacity: A4 2450 sheets, A3/A4R/A5 650 sheets Tray C (Lower) Capacity: A4/ASR 250 sheets, A3/A4R 125 sheets Paper Weight: 60 to 256 gsm Staple Position: Corner, Double Staple Capacity: A4: 50 sheets; A3/A4R: 30 sheets; Dimensions (W x D x H): 644 mm x 656 mm x 1121 mm (when the extension tray is not extended) Weight: Approx. 48 kg	EFI-Fiery based controller options 2	SEQUENCE IMPOSE: A cross-platform document imposition solution which is available through Command WorkStation on the FIERY-based controller. SEQUENCE COMPOSE: A cross-platform document assembly and composition solution for the FIERY-based controller which is available through Command WorkStation. SEQUENCE SUITE: Document imposition and composition solution for the FIERY-based controller, which includes both SeeQuence Impose and SeeQuence Compose in one package.
Booklet Finisher	Name: BOOKLET FINISHER-P1 (External) Number of Trays: 3 Tray A (Upper) Capacity: A4 1300 sheets, A3/A4R/A5 650 sheets Tray B (Middle) Capacity: A4 2450 sheets, A3/A4R/A5 650 sheets Tray C (Lower) Capacity: A4/ASR 250 sheets, A3/A4R 125 sheets Paper Weight: 60 to 256 gsm Staple Position: Corner, Double Staple Capacity: A4: 50 sheets; A3/A4R: 30 sheets; Booklet Stitch paper size: A3, A4R Booklet Stitch Staple Capacity: 16 sheets (64 pages, 64-81gsm) x 10 booklets Dimensions (W x D x H): 646 mm x 656 mm x 1121 mm (when the extension tray is not extended) Weight: Approx. 70.5kg	System accessories	WEB ACCESS SOFTWARE-H1: Provide access to websites and other web-based online content. SUPER G3 FAX BOARD-AL1: Adds fax functionality. SUPER G3 2ND LINE FAX BOARD-AL1: Adds second fax line. REMOTE FAX KIT-A1: Enables the device to send and receive fax from another device connected with a fax board. MULTIMEDIA READER/WRIITER-A2: External multi-slot memory card reader/writer. SERIAL INTERFACE KIT-K1: Serial interface for Cost Recovery Solutions. COPY CONTROL INTERFACE KIT-A1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's imageRUNNER ADVANCE range for cost recovery use. ADDITIONAL MEMORY TYPE D (512MB)
Paper Deck Unit	Name: PAPER DECK UNIT-A1 Paper Size: A4 Paper Weight: 52 to 220 gsm Paper Capacity: 3500 sheets (80 gsm) Dimensions (W x D x H): 323 mm x 583 mm x 570 mm Weight: Approx. 37 kg	Device security accessories	HDD DATA ENCRYPTION AND MIRRORING KIT-C5: Provides encryption and mirroring of both temporary and permanent data. Encryption enables copied or scanned images to be encrypted BEFORE they are saved on the device's hard drive. The pack includes the Common Criteria level EAL3 certified Canon MFP security kit 2.01. Mirroring copies all data in real time, providing a highly reliable back-up. 2.5INCH/160GB HDD-J1: Additional HDD required for the hard disk mirroring function. 2.5INCH/1TB HDD-K1: A replacement HDD to increase the storage space on the device. Note: The mirroring function requires a second 1TB HDD. REMOVABLE HDD KIT-AG1: Allows the physical removal of the Hard Disk Drive when the device is not in use to protect confidential data.
Puncher Unit/s	Name: PAPER DECK UNIT-D1 Paper Size: A4/A3/A4R Paper Weight: 52 to 220 gsm Paper Capacity: 3500 sheets (80 gsm) Dimensions (W x D x H): 601 mm x 621 mm x 570 mm Weight: Approx. 57 kg	Document security	DOCUMENT SCAN LOCK KIT-B1: Increases document security by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing. SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED SECURE PRINT SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before documents can be printed.
Document Insertion/Folding Unit	Document Insertion/ Folding Unit-H1 (requires either the Booklet Finisher-P1 or Staple Finisher-P1) Number of insertion trays: 1 Tray Insertion Paper Size/ Weight: A3, A4, A4R, 60 to 256 gsm Insertion Capacity: 100 sheets (80 gsm) C-Fold Paper Size/ Weight: A4R/ 60 to 105 gsm C-Fold Output Capacity: 40 sheets Z-Fold Paper Size/ Weight: A3, A4R/ 60 to 105 gsm Z-Fold Output Capacity: 40 sheets Dimensions (W x D x H): 662mm x 679mm x 1242mm Weight: Approx. 76kg	Accessibility accessories	ADF ACCESS HANDLE-A1: Attaches to the document feeder, making access easier for seated users. REMOTE OPERATORS SOFTWARE KIT-B1: Allows use of the device control panel screens from remote computers. VOICE GUIDANCE KIT-F2: Recorded voice provides confirmation of basic menu settings, making the system easier to use for the visually impaired. VOICE OPERATION KIT-C2: Enables the user to set various functions on the device using verbal instructions and audible feedback.
Document Insertion Unit	Document Insertion Unit-L1 (Optional and requires either the Booklet Finisher-P1 or Staple Finisher-P1) Number of insertion trays: 1 Tray Insertion Paper Size/ Weight: A3, A4, A4R, 60 to 256 gsm Insertion Capacity: 100 sheets (80 gsm) Dimensions (W x D x H): 662mm x 679mm x 1242mm Weight: Approx. 40kg	Other options	STAMP INK CARTRIDGE-C1 STAPLE CARTRIDGE-D3: (R) GP for Booklet Finisher-P1. STAPLE CARTRIDGE-J1: GP for Staple Finisher J1 and Booklet Finisher-P1.
<b>ADDITIONAL OPTIONS</b>		<b>Standard disclaimers</b>	All specifications subject to change without notice
Hardware accessories 1	PRINTER COVER-B1: Printer cover for main body without colour image reader unit. COPY TRAY-Q1: Provides a simple tray for basic output needs. Capacity: 250 sheets (A4). SHIFT TRAY-E1: Capacity: 500 Sheets TAB FEEDING ATTACHMENT KIT-B1: Allows users to print on A4-sized tab paper which is loaded in paper cassette 3 and 4	<b>Footnotes</b>	[1] Based on ITU-T Standard Chart No.1 [2] 0.9 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information [3] Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by ENERGY STAR ( <a href="http://www.eu-energystar.org">http://www.eu-energystar.org</a> ). [4] Declared noise emission in accordance with ISO 7779 [5] Based on 6% coverage
Hardware accessories 2	MiCARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indala and Mifare etc.). Integrates with Universal Login Manager and uniFLOW. CARD READER-F1: Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW) COPY CARD READER ATTACHMENT-A2: Attachment kit for Copy Card Reader-F1 only. UTILITY TRAY-A2: Additional tray to hold an external USB keyboard. STAMP UNIT-B1 UPRIGHT CONTROL PANEL-B1: Optional 26.4 (10.4 inch) TFT SVGA tiltable colour touchscreen display CONTROL PANEL SHEET-E1		
Print controller accessories	PCL INTERNATIONAL FONT SET-A1: Adds PCL support for Andalé Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese). PS PRINTER KIT-AV1: Adds Genuine Adobe PostScript Support. Also enables users to print PDF/PS/EPS files directly to the device.) DIRECT PRINT KIT (FOR PDF/XPS)-H1: Enables users to print PDF/XPS files directly to the device. BARCODE PRINTING KIT-D1: Enables printing of barcodes in SAP R/3 environments, other Enterprise Resource Planning (ERP) software, as well as Windows-based applications.		
Document Publishing	IW DESKTOP: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorisation.		
EFI-Fiery based controller	IMAGEPASS-U2: Canon and EFI co-developed FIERY based print controller designed for demanding office workgroups that require high productivity and accurate colour output. Supports PCL and Adobe P3 printing. REMOVABLE HARD DISK DRIVE KIT-B4: Provides the user with the ability to remove the hard disk drive of the server (when not in use) for storage in a secure location.		



Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English Edition  
© Canon Europa N.V., 2012