


imageRUNNER C1325iF/C1335iF

Compact and productive colour multifunctionals

These feature rich A4 multifunctional devices are designed for cost conscious businesses that require productive high quality colour communication for small workgroups. A compact design means they fit perfectly into small office environments.



Productivity:

- Simple operation with a 8.9 cm colour touch and swipe user interface
- A range of flexible mobile printing and scanning capabilities, such as Apple AirPrint™, Mopria printing and Canon's optional uniFLOW solution, support mobile worker efficiency
- Up to 2,300 sheet paper capacity for busy workgroups and departments in any size organisation
- Enhanced productivity and paper saving with auto duplex functionality
- Easily scan and send documents directly to a variety of destinations including email and shared folder
- Easy maintenance design for less downtime
- Canon's V² colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest

Security and cost control:

- Efficient, high quality colour printing thanks to separate toner and drum technology
- The functionality of many devices in one compact multifunctional device
- Documents remain secure with features such as secure print, pin release and optional PDF password protection
- Greater cost control and security with embedded support for Canon's optional uniFLOW software
- Canon's longer life drum technology reduces the need to replace consumables frequently



PRINT



COPY



FAX



SCAN

Canon

• Compact and productive colour multifunctionals

imageRUNNER C1325iF/C1335iF

Integration and management:

- With their compact design, these devices fit into various office environments where space is a premium either as a desktop or floor standing
- Seamlessly integrate these devices into IT environments, supporting industry standards such as PCL and Genuine Adobe PS
- Reduce fleet management and administration burden with automated meter collection, consumables management, remote updating and diagnostics


Energy efficient:

- Class-leading Typical Electricity Consumption (TEC)* ratings
- Consumes as little as 1 W in sleep mode
- Rapid recovery from sleep mode
- ENERGY STAR® qualified
- Qualifies for the stringent Blue Angel Award**

*Typical Energy Consumptions as defined by ENERGY STAR
<http://www.eu-energystar.org>

**imageRUNNER C1325iF only

AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

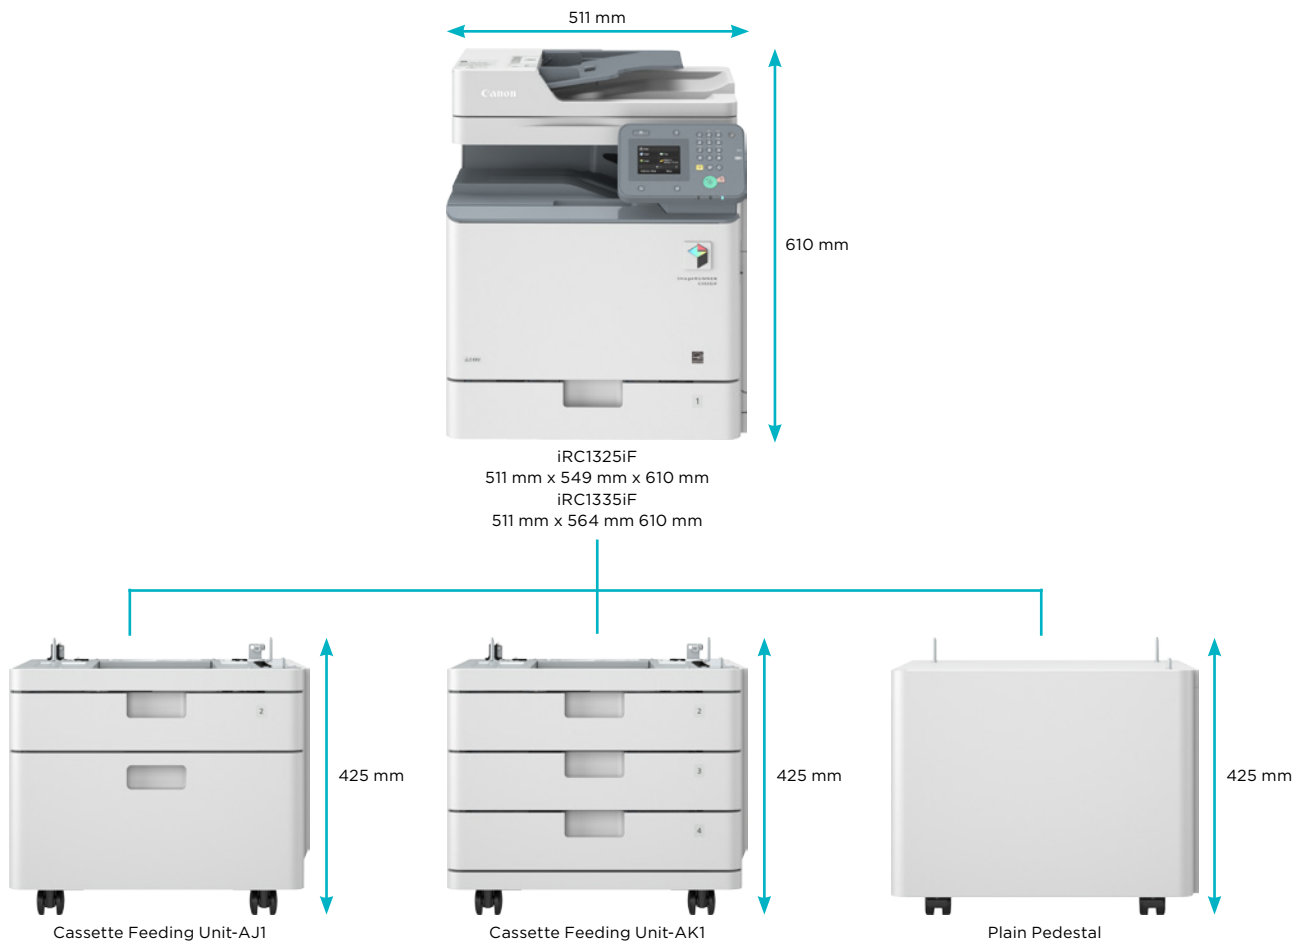

Technical Specifications

imageRUNNER C1325iF/C1335iF

Machine type

Available core functions

Colour A4 Laser Multifunctional (Reader / Printer standard)
Print, Copy, Scan, Send and Fax standard

Printer Specifications

Print speed (BW/Colour)

C1335iF: 35/35ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 35/35ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)
C1325iF: 25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)

Printing method

Colour Laser Beam Printing

Print resolution

2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi

Double sided printing

Automatic (Standard)

Direct print

Direct printing available from USB memory key
Supported file types: JPEG, TIFF, PDF

Printing from mobiles or internet-connected devices and cloud-based services

A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.

Paper input (Standard)

1 x 550-sheet (80 gsm) cassette,
100-sheet (80 gsm) multi-purpose tray

Paper input (Option)

1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1)
3 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AK1)

Maximum paper input capacity

250 sheets (80 gsm)

Paper output capacity

Standard: Collate, Group

Finishing capabilities

Supported media types

Cassette/s:
Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes*
*Envelope support via standard cassette 1 only.
Multi-purpose tray:
Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)

Supported media sizes

Paper cassette 1:
Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL)
Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)

Paper cassettes 2, 3 and 4:
Standard size: A4, A5, B5, Legal, Letter, Executive, Statement
Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)

Multi-purpose tray:
Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5,DL)

Supported media weights

Cassette/s : 60 to 163 gsm
Multi-purpose tray: 60 to 220 gsm
Duplex: 60 to 163 gsm

Page Description Language(s)

UFRII, PCL5c/6, Adobe PostScript Level 3 (Standard on all models)

Fonts

PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts
PS fonts: 136 Roman fonts

Operating System compatibility

UFRII: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later)
PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2
PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later)
PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1
Please refer to <http://software.canon-europe.com/> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.
SAP Device Types are available via the SAP Market Place.

Copy Specifications

Copy speed (BW/Colour)

Please refer to the quoted print speeds

First Copy Output Time (FCOT)

C1335iF: 5.9 sec / 7.4 sec
C1325iF: 8.4 sec / 10.5 sec

(BW/Colour)

Copy resolution

Reading: 600 dpi x 600 dpi
Printing: 600 dpi x 600 dpi

Multiple copy

Up to 999 copies

Reduction/Enlargement

Zoom: 25 - 400 % in 1 % increments
Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%

Scan Specifications

Optional/Standard

Supported media size/s

Standard on all models (DADF 50 sheets)
A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF)

Supported media weight/s

Single-sided scanning: 50 to 105 gsm (DADF)
Double-sided scanning: 64 to 105 gsm (DADF)

Scan resolution

BW Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi

CL Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi
2-sided to 2-sided (Automatic)

Double sided scanning

Scan speed

C1335iF:
BW single-sided: 35 ipm (A4, 300 dpi X 300 dpi),
BW double-sided: 11 ipm (A4, 300 dpi X 300 dpi)
CL single-sided: 35 ipm (A4, 300 dpi X 300 dpi),
CL double-sided: 11 ipm (A4, 300 dpi X 300 dpi)
C1325iF:
BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi),
BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi)
CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi),
CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi)

Scan methods

Push Scan: Colour Send functionality is standard.
Pull Scan: TWAIN / WIA Pull scanning available on all models.
Scan to USB Memory Key: Available on all models
Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.

Pull scan specifications

TWAIN/WIA Pull scanning
Windows XP
Windows Vista/Windows 7/Windows 8/Windows 8.1
Mac Scan (TWAIN only)
Mac OS X 10.5.8 or later
*The drivers are available via <http://software.canon-europe.com>.

Send Specifications

Optional/Standard

Send resolution

Standard on all models
100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi,
200 dpi x 400 dpi, 400 dpi, 600 dpi

Destinations

E-Mail, Fax, PC (SMB, FTP)

Address Book/Speed dials

LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials)

File formats

SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF
E-mail : PDF, Compact PDF, Searchable PDF

Optional Universal Send

Feature Sets

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Fax Specifications

Optional/Standard

Modem speed

Standard on all models
Super G3 33.6 kbps (Up to 3 seconds per page¹)

Fax resolution

Standard: 200 x 100 dpi
Fine: 200 x 200 dpi
Super fine: 200 x 400 dpi
Ultra fine: 400 x 400 dpi

FAX memory

Up to 512 pages¹

Speed dials

Max. 281

Group dials/destinations

Max. 199 dials

Sequential broadcast

Max. 310 addresses

Memory backup

Yes

Other features

Fax Forwarding, Dual Access, PC Fax (TX only)

General Specifications

Warm-up time

Approx. 34 seconds from power ON

Recovery from sleep mode

10 seconds or less

Interface type

USB 2.0 Hi-Speed, 1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device
Recommended third party wireless solution is Silex SX-BR-4600 WAN For more details please refer to www.silex-europe.com

Network protocols

TCP / IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP),
IPX / SPX (NDS, Bindery)
*IPv4 / IPv6 support

Memory

Control panel

1.0 GB

QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display

Dimensions (W x D x H)

Standard:
C1325iF 511 mm x 549 mm x 610 mm
C1335iF 511 mm x 564 mm x 610 mm

Optional:
C1325iF With Cassette Feeding Unit-AJ1:
511 mm x 549 mm x 1035 mm

C1325iF With Cassette Feeding Unit-AK1:
511 mm x 549 mm x 1035 mm

C1325iF With Plain Pedestal Type-F1:
511 mm x 549 mm x 1035 mm

C1335iF With Cassette Feeding Unit-AJ1:
511 mm x 564 mm x 1035 mm

C1335iF With Cassette Feeding Unit-AK1:
511 mm x 564 mm x 1035 mm

C1335iF With Plain Pedestal Type-F1:
511 mm x 564 mm x 1035 mm

Technical Specifications

imageRUNNER C1325iF/C1335iF

Installation space (W x D)	C1325iF: 852 mm x 843 mm (Main unit + Multi-purpose tray open + Cassette drawers open) C1335iF: 852 mm x 858 mm (Main unit + Multi-purpose tray open + Cassette drawers open)
Weight	Approx. 43 kg excluding toner
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80 % RH (no condensation)
Power source	220 - 240 V (±10 %), 50 / 60 Hz (±2 Hz), 3.7 AMP
Power consumption	Maximum: Approx. 1.5 KW Standby: Approx. 30 W Sleep mode: Approx. 1.0 W or less ² Time to put the device to sleep mode: 60 sec Typical Electricity Consumption (TEC) rating ³ : 1.2 kWh (C1335iF) / 0.8 kWh (C1225iF)
Noise levels Sound Pressure⁴ (reference data, LpAm, Bystander's position)	Sound Pressure Noise Levels: C1325iF Active: 50 dB Standby: Inaudible (Less than 30dB) C1335iF Active: 51 dB Standby: Inaudible (Less than 30dB)
Software and printer management	iW Management Console: Server-based software for centralised management of a fleet of devices eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics. Remote Firmware System (GDLS): Allows the remote distribution of firmware, Remote User Interface (RUI): Web-based interface to each device that helps to provide remote device management and control. Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers
Security features	Standard: IP / Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID Optional: Send PDF Security Feature Set-E1@E The following items require uniFLOW: My Print Anywhere secure print, Data Loss Prevention.
Consumables	
Toner bottle	C-EXV 48 Black/Cyan/Magenta/Yellow Toner (Yield: BK 16,500 / CMY 11,500 pages) ⁵

Specifications for options

Cassette feeding unit

Name: Cassette Feeding Unit-AJ1
Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.
Dimensions (W x D x H): 511 mm x 508 mm x 425 mm
Weight: Approx. 15 kg

Name: Cassette Feeding Unit-AK1
Description: Optional cassette feeding unit with 3 x 550 sheets paper capacity. Takes the cassette paper capacity up to 2,300 sheets.
Dimensions (W x D x H): 511 mm x 508 mm x 425 mm
Weight: Approx. 19 kg

Hardware accessories 1

Plain Pedestal Type-F1: The pedestal can be placed under the standard cassette module to raise the device when free-standing. (Height of Pedestal: 426 mm)

Hardware accessories 2

Copy Card Reader Attachment-H1:
HANDSET-J1 EUR / HANDSET-J1 SA:
Copy Card Reader-F1:
MICARD Attachment Kit-A1:

Print controller accessories

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

System accessories

Copy Control Interface Kit-C1: Allows connection (CCV1 I / F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.

Document security accessories

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Accessibility accessories

ADF ACCESS HANDLE-A1: Attaches to the document feeder, making access easier for seated users.

Footnotes

¹ Based on ITU-T Standard Chart No. 1

² 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

³ Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

⁴ Declared noise emission in accordance with ISO 7779

⁵ Based on 5% coverage (A4)

All specifications subject to change without notice



C1325iF only



Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2014

Canon (UK) Ltd
Woodhatch
Reigate
Surrey RH2 8BF
Telephone no 01737 220000
Facsimile 01737 220022
canon.co.uk

Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co. Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie

